

**EKVA**



EKVA Ltd. Is a electrical materials production company, EKVA Ltd. engages cca. 60 Machines for plastic injection, duroplast injection and pressing, metal stamping and contact whelding and a automatic assembly line.

EKVA Ltd. also has it's own tools department for the service and repairment of our own tools. The production capacity is measured in millions of pcs. needed for our industry depending on Type of product.

Having in mind our huge experience in the processing of polymers, duroplasts, elastomers, thermoplasts and other materials, we are able to guarantee a high quality product at any time, also we dare to say that we are probably the only company in this branch in Europe which uses pure silver for electrical contacts which again allows our products a long time functionality.

The company EKVA Ltd. Inherited it's know-how and overall knowledge from a very known company in this region Elektrokontakt Zagreb with which we cooperated for 20 Years . Elektrokontakt Zagreb was founded in 1926 and was the leading company in electrical materials in the region.

EKVA D.O.O.



# Catalogue



**Quality, reliability, safety and design** of our products is an absolute priority. A large number of our partners in Bosnia and Herzegovina and the countries of the whole Balkan region as well as hundreds of thousands of our products installed in your homes each year are sort of **guarantee and recommendation for your future choice.**

[www.ekvabh.com](http://www.ekvabh.com)

EKVA D.O.O.


# Contents

|                                                |    |
|------------------------------------------------|----|
| STRANDARD eco .....                            | 6  |
| BELL eco .....                                 | 10 |
| ALORA eco .....                                | 16 |
| ALORA eco Modular system .....                 | 22 |
| VALERIA .....                                  | 28 |
| KLASIK eco .....                               | 34 |
| KLASIK eco Modular system .....                | 40 |
| Flexible conduit .....                         | 46 |
| SURFACE-MOUNTING OG .....                      | 50 |
| MULTIPLE PORTABLE SOCKETS .....                | 52 |
| DISTRIBUTION BOARDS AND POWE METER PANEL ..... | 56 |
| METER AND DISTRIBUTION CAINETS KPMO .....      | 57 |

## STANDARD eco



The symbol of elegance  
that moves with time.

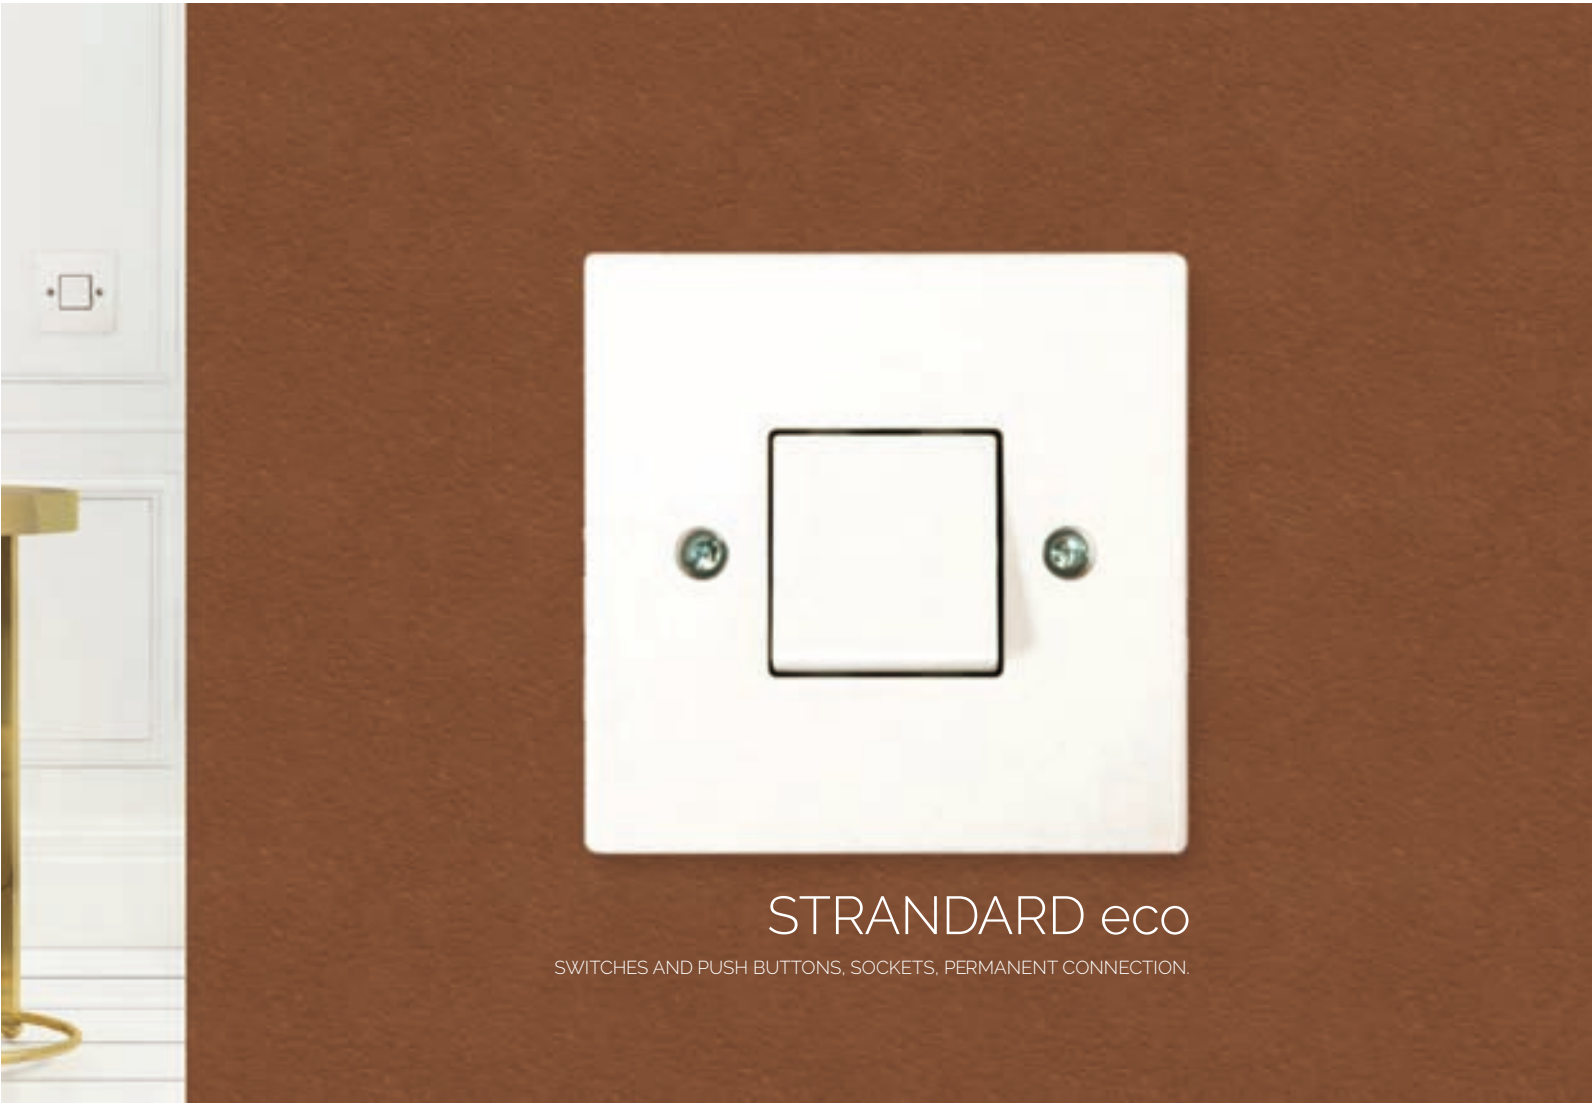

STRANDARD eco

SWITCHES AND PUSH BUTTONS, SOCKETS, PERMANENT CONNECTION.

# STANDARD eco

## Technical specification "Standard eco"

### SWITCHES AND PUSH BUTTONS

- Nominal values 10A, 250 V ~ (AC)
- Screw connection
- In wall installation - In box Ø 60mm
- Norms: HRN EN 60669-1; DIN EN 60669-1

### PERMANENT CONNECTIONS

- Nominal voltage: 400 V / (380 V) (AC)
- Number of pole 5 (five) 3P+N+ (PE)
- Screw connection za vodiče 2,5 mm<sup>2</sup>
- In wall installation - In box Ø 60mm
- For permanent connection of electrical devices such as electrical stove and oven...
- Norms: DIN VDE 0606-1
- Test Mark

### SOCKETS

- Nominal values: 16 A, 250 V ~ (AC)
- Number of pole: 2P + (PE)
- Screw connection
- In wall installation - In box Ø 60mm
- Norms: HRN IEC 60884-1; DIN VDE 0620-1
- Test Mark

## Switches and push buttons



NORMAL SWITCH

CODE 11101.01 | WHITE | PAC/PCS 25

INTERMEDIATE SWITCH

CODE 11103.01 | WHITE | PAC/PCS 25

TWO-WAY SWITCH

CODE 11104.01 | WHITE | PAC/PCS 25



SERIAL SWITCH

CODE 11102.01 | WHITE | PAC/PCS 25

The symbol of elegance  
that moves with time.

## Sockets



DOORBELL PUSH BUTTON WITH INDICATOR LIGHT  
CODE 11108.01 | WHITE | PAC/PCS 25



LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 11107.11 | WHITE | PAC/PCS 25



2- POLE SOCKET  
CODE 11080.1 | WHITE | PAC/PCS 15  
SOCKET WITH CHILD PROTECTION  
CODE 11083 | WHITE | PAC/PCS 15



SOCKET WITH COVER  
CODE 11108.4 | WHITE | PAC/PCS 15



DOUBLE SOCKET  
CODE 11108.5 | WHITE | PAC/PCS 12



PERMANENT CONNECTION  
CODE 1111 | WHITE | PAC/PCS 20

BELL eco



Simplicity and function in nuances  
of white and ivory.



BELL eco

SWITCHES AND PUSH BUTTONS, SOCKETS, PHONE CONNECTION,  
ANT/SAT CONNECTION

# BELL eco

## Technical specification “Bell eco”

### SWITCHES AND PUSH BUTTONS

- Nominal values 10A, 250 V ~ (AC)
- Screw connection
- In wall installation - In box Ø 60mm
- Norms: HRN EN 60669-1; DIN EN 60669-1

### SOCKETS

- Nominal values: 16 A, 250 V ~ (AC)
- Number of pole: 2P + (PE)
- Screw connection
- In wall installation - In box Ø 60mm
- Norms: HRN IEC 60884-1; DIN VDE 0620-1
- Test Mark

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Installation In box Ø 60mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 Mhz, 55 dB
- Installation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunicational devices
- Max. Voltage: 125 V ~ (AC)
- Max. curren: 1.5 A
- Screw connection
- Contact material: CuSn
- Contact surface gold over nickel
- Installation In box Ø 60mm with screws
- Croatian Telecommunications Norms
- Explanation
  - Modular-Jack connector
  - First number- size of connectors, for example 6 or 8
  - Second number- number of poles, for example 2 or 4

Simplicity and function in nuances  
of white and ivory.

## Switches and push buttons



NORMAL SWITCH  
CODE 11101.41/42 BEIGE/WHITE | PAC/PCS20

INTERMEDIATE SWITCH  
CODE 11103.41/42 BEIGE/WHITE | PAC/PCS20

TWO-WAY SWITCH  
CODE 11104.41/42 BEIGE/WHITE | PAC/PCS20



SERIAL SWITCH  
CODE 11102.41/42 BEIGE/WHITE | PAC/PCS20



DOORBELL PUSH BUTTON WITH INDICATOR LIGHT  
CODE 11108.51/52 BEIGE/WHITE | PAC/PCS20

PUSH-BUTTON FOR BELL WITHOUT SIG. LAMP  
CODE 11108.41/42 BEIGE/WHITE | PAC/PCS20



LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 11107.51/52 BEIGE/WHITE | PAC/PCS20



2- POLE SOCKET  
CODE 11020.211/221 BEIGE/WHITE | PAC/PCS15



SOCKET WITH COVER  
CODE 111021.211/221 BEIGE/WHITE | PAC/PCS15

## Sockets

# BELL eco

## Sockets



DOUBLE SOCKET  
CODE 11085.211/221 BEIGE/WHITE | PAC/PCS 12



TELEPHON SOCKET 1 CON.  
CODE 11032.211/221 BEIGE/WHITE | PAC/PCS10



TELEPHON SOCKET 2 CON.  
CODE 11032.212/222 BEIGE/WHITE | PAC/PCS15



ANTENNA SOCKET  
CODE 11040.221/222 BEIGE/WHITE | PAC/PCS10



ANT/SAT SOCKET PASSTROUGH  
CODE 11040.321/322 BEIGE/WHITE | PAC/PCS10

ANT/SAT SOCKET (TERMINAL)  
CODE 11040.211/212 BEIGE/WHITE | PAC/PCS10

ANT/SAT SOCKET - END  
CODE 11040.311/312 BEIGE/WHITE | PAC/PCS10

Simplicity and function in nuances  
of white and ivory.



ALORA eco



Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.



ALORA eco

SWITCHES AND PUSH BUTTONS, SOCKETS, ANTENNA CONNECTION,  
PHONE CONNECTION, PC CONNECTION

# ALORA eco

## Technical specification "Alora eco"

### SWITCHES AND PUSH BUTTONS

- Nominal values: 10AX, 250 V - (AC) (x) za fluorescentne cijevi
- Screwless connections (for solid conductors, max. 2,5 mm<sup>2</sup> per terminal)
- Instalation In box Ø 60mm with screws
- Norms: HRN EN 60669-1; DIN EN 60669-1
- Test Mark: dve

### SOCKETS

- Nominal values: 16 A, 250 V - (AC)
- Number of pole: 2P (PE)
- Screw connection (za vodice maks. 2,5 mm<sup>2</sup>)
- Instalation In box Ø 60mm with screws
- Norms: HRN IEC 60884-1; DIN VDE 0620-1

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0,1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0,1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 Mhz, 55 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunicational devices - Max. Voltage: 125 V - (AC)
- Max. curren: 15 A
- Screw connection
- Contact material: CuSn
- Contact surface gold over nickel
- Instalation In box Ø 60mm with screws

- Croatian Telecommunications Norms
- Explanation Modular-Jack connector
- First number- size of connectors, for example 6 or 8

### PC CONNECTION

- Nominal voltage maks. 50 V DC
- Projected Power max: 1A na 50
- Voltage strenght: 1000V DC
- Isolation resistance: 500  $\Omega$ M
- Contact resistance: 20  $\Omega$ m
- Contact durability: >2500 input cycles
- Contact Terminals: LSA contacts for power conduits, diameter
- AWG 26...22, outside diameter 0,7-1,1 mm (one power conduit per contact)
- Suitable for use up to 155 Mbit/s
- Instalation In box Ø 60mm with screws
- Connection made easy with the lever attached
- It is not protected from electromagnetical fields

Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.

### Switches and push buttons



NORMAL SWITCH

CODE 16011.400 | WHITE | PAC/PCS 15 .

INTERMEDIATE SWITCH

CODE 16031.400 | WHITE | PAC/PCS 15 .

TWO-WAY SWITCH

CODE 16041.400 | WHITE | PAC/PCS 15 .



SERIAL SWITCH

CODE 16051.400 | WHITE | PAC/PCS 15 .



2-POLE SWITCH WITH INDICATOR LAMP

CODE 16023.400 | WHITE | PAC/PCS 15 .



DOORBELL PUSH BUTTON WITH INDICATOR LIGHT

CODE 16062.404 | WHITE | PAC/PCS 15 .



PUSH-BUTTON FOR BELL WITHOUT SIG. LAMP

CODE 16061.404 | WHITE | PAC/PCS 15 .



LIGHT PUSH BUTTON WITH INDICATOR LIGHT

CODE 16062.403 | WHITE | PAC/PCS 15 .

# ALORA eco

## Sockets



SOCKET 2-POL  
CODE 16321.410 | WHITE | PAC/PCS 15




SOCKET WITH COVER  
CODE 16322.400 | WHITE | PAC/PCS 15



SOCKET CAT6 SA 1 CON  
CODE 16363.411 | WHITE | PAC/PCS 15

SOCKET CAT6 SA 2 CON  
CODE 16363.410 | WHITE | PAC/PCS 15



TELEPHON SOCKET 1 CON.  
CODE 16321.410 | WHITE | PAC/PCS 15



TELEPHON SOCKET 2 CON.  
CODE 16322.410 | WHITE | PAC/PCS 15



ANT/SAT SOCKET PASSTROUGH  
CODE 16312.410 | WHITE | PAC/PCS 15

ANT/SAT SOCKET - END  
CODE 16311.410 | WHITE | PAC/PCS 15

Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.

## Sockets



-----  
ANT/SAT SOCKET PASSTROUGH  
CODE 16314410 | WHITE | PAC/PCS 15  
-----  
ANT/SAT SOCKET - END  
CODE 16313410 | WHITE | PAC/PCS 15  
-----

## ALORA eco modular system



Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.



## ALORA eco modular system

SWITCHES AND PUSH BUTTONS, SOCKETS, ANTENNA CONNECTION,  
PHONE CONNECTION, PC CONNECTION

# ALORA eco modular system

## Technical specification "Alora eco Modular system"

### SWITCHES AND PUSH BUTTONS

- Nominal values 10AX, 250 V ~ (AC) (x) za fluorescentne cijevi
- Screwless connections (for solid conductors, max. 2,5 mm<sup>2</sup> per terminal)
- Instalation In box Ø 60mm with screws
- Norms: HRN EN 60669-1; DIN EN 60669-1
- Test Mark: dve

### SOCKETS

- Nominal values: 16 A, 250 V ~ (AC)
- Number of pole: 2P + (PE)
- Screw connection (za vodiče maks. 2,5 mm<sup>2</sup>)
- Instalation In box Ø 60mm with screws
- Norms: HRN IEC 60884-1; DIN VDE 0620-1

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Instalation In box Ø 60 mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 Mhz, 55 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunication devices
- Max. Voltage: 125 V ~ (AC)
- Max. current: 15 A
- Screw connection
- Contact material: CuSn
- Contact surface gold over nickel

- Instalation In box Ø 60mm with screws
- Croatian Telecommunications Norms
- Explanation
- Modular-Jack connector
- First number- size of connectors, for example 6 or 8

### PC CONNECTION

- Nominal voltage maks. 50 V DC
- Projected Power max: 1A na 50
- Voltage strenght: 1000V DC
- Isolation resistance: 500  $\Omega$ M
- Contact resistance: 20  $\Omega$ m
- Contact durability: >2500 input cycles
- Contact Terminals: LSA contacts for power conduits, diameter
- AWG 26..22, outside diameter 0,7-1,1 mm (one power conduit per contact)
- Suitable for use up to 155 Mbit/s
- Instalation In box Ø 60mm with screws
- Connection made easy with the lever attached
- It is not protected from electromagnetic fields

Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.

### Switches and push buttons



FOOTHOLD NORMAL SWITCH  
CODE 16011.492 | WHITE | PAC/PCS 15  
FOOTHOLD INTERMEDIATE SWITCH  
CODE 16031.492 | WHITE | PAC/PCS 15  
FOOTHOLD TWO-WAY SWITCH  
CODE 16041.492 | WHITE | PAC/PCS 15



FOOTHOLD SERIAL SWITCH  
CODE 16051.492 | WHITE | PAC/PCS 15



FOOTHOLD SWITCH  
KIP WITH INDICATOR  
CODE 16023.492 | WHITE | PAC/PCS 15



FOOTHOLD PUSH-BUTTON FOR  
BELL WITH SIGNAL  
CODE 16061.492 | WHITE | PAC/PCS 15



FOOTHOLD PUSH-BUTTON FOR  
BELL WITHOUT SIGNAL  
CODE 16062.492 | WHITE | PAC/PCS 15




FOOTHOLD PUSH-BUTTON FOR  
LIGHT WITH INDICATOR  
CODE 16062.492 | WHITE | PAC/PCS 15

# ALORA eco modular system


## Sockets



FOOTHOLD SOCKETS 2-POL  
CODE 16200.490 | WHITE | PAC/PCS 15




FOOTHOLD SOCKETS WITH  
COVER  
CODE 16212.492 | WHITE | PAC/PCS 15




FOOTHOLD SOCKETS  
CAT6 SA 1 CON.  
CODE 16363.419 | WHITE | PAC/PCS 15



FOOTHOLD SOCKETS  
CAT6 SA 2 CON.  
CODE 16363.492 | WHITE | PAC/PCS 15



FOOTHOLD TELEPHONE  
SOCKETS WITH 1 CON.  
CODE 16321.492 | WHITE | PAC/PCS 15



FOOTHOLD TELEPHONE  
SOCKETS WITH 2 CON.  
CODE 16322.492 | WHITE | PAC/PCS 15

Highest safety standards, installment compatibility  
ergonomic control for absolute comfort.

## Sockets




FOOTHOLD ANT.  
SOCKETS PASSTROUGH

CODE 16312.492 | WHITE | PAC/PCS 15

FOOTHOLD ANT.  
SOCKETS END

CODE 16311.492 | WHITE | PAC/PCS 15



FOOTHOLD ANT/SAT  
SOCKETS PASSTROUGH

CODE 16314.492 | WHITE | PAC/PCS 15

FOOTHOLD ANT/SAT  
SOCKETS END

CODE 16313.492 | WHITE | PAC/PCS 15



SINGLE FRAME

CODE 16000.401 | WHITE | PAC/PCS 15

DOUBLE FRAME

CODE 16000.402 | WHITE | PAC/PCS 10



TRIPLE FRAME

CODE 16000.403 | WHITE | PAC/PCS 5

QUADRUPLE FRAME

CODE 16000.404 | WHITE | PAC/PCS 5



VALERIA



Intelligent technology,  
simple installation.



VALERIA

SWITCHES AND PUSH BUTTONS, SOCKETS, ANTENNA CONNECTION,  
PHONE CONNECTION, PC CONNECTION

# VALERIA

## Technical specification "Valeria"

### SWITCHES AND PUSH BUTTONS

- Nominal values 10AX, 250 V ~ (AC) (x) za fluorescentne cijevi
- Screwless connections (for solid conductors, max. 2.5 mm<sup>2</sup> per terminal)
- Instalation In box Ø 60mm with screws
- Norms: HRN EN 60669-1; DIN EN 60669-1
- Test Mark: dve

### SOCKETS

- Nominal values: 16 A, 250 V ~ (AC)
- Number of pole: 2P + (PE)
- Screw connection (za vodice maks. 2.5 mm<sup>2</sup>)
- Instalation In box Ø 60mm with screws
- Norms: HRN IEC 60884-1; DIN VDE 0620-1

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 db, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 MHz, 55 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunication devices
- Max. Voltage: 125 V ~ (AC)
- Max. current: 1.5 A
- Screw connection
- Contact material: CuSn
- Contact surface gold over nickel

- Instalation In box Ø 60mm with screws
- Croatian Telecommunications Norms
- Explanation
- Modular-Jack connector
- First number- size of connectors, for example 6 or 8

### PC CONNECTION

- Nominal voltage maks. 50 V DC
- Projected Power max: 1A na 50
- Voltage strenght: 1000V DC
- Isolation resistance: 500  $\Omega$ M
- Contact resistance: 20  $\Omega$ m
- Contact durability: >2500 input cycles
- Contact Terminals: LSA contacts for power conduits, diameter
- AWG 26..22, outside diameter 0.7-1.1 mm (one power conduit per contact)
- Suitable for use up to 155 Mbit/s
- Instalation In box Ø 60mm with screws
- Connection made easy with the lever attached
- It is not protected from electromagnetic fields

Intelligent tehnology,  
simple installation.

## Switches and push buttons



NORMAL SWITCH  
CODE 16011.500 | WHITE | PAC/PCS 15 .

INTERMEDIATE SWITCH  
CODE 16031.500 | WHITE | PAC/PCS 15 .

TWO-WAY SWITCH  
CODE 16041.500 | WHITE | PAC/PCS 15 .



SERIAL SWITCH  
CODE 16051.500 | WHITE | PAC/PCS 15 .



2-POLE SWITCH WITH INDICATOR LAMP  
CODE 16023.500 | WHITE | PAC/PCS 15 .



LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 16062.503 | WHITE | PAC/PCS 15 .



PUSH-BUTTON FOR BELL WITHOUT SIG. LAMP  
CODE 16061.504 | WHITE | PAC/PCS 15 .



LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 16062.503 | WHITE | PAC/PCS 15 .

# VALERIA

## Sockets



SOCKET 2-POL  
CODE 16210.510 | WHITE | PAC/PCS 15



SOCKET CAT6 SA 1 CON  
CODE 16363.511 | WHITE | PAC/PCS 15  
SOCKET CAT6 SA 2 CON  
CODE 16663.510 | WHITE | PAC/PCS 15



TELEPHON SOCKET 1 CON.  
CODE 16321.510 | WHITE | PAC/PCS 15



TELEPHON SOCKET 2 CON.  
CODE 16322.510 | WHITE | PAC/PCS 15



ANT/SAT SOCKET - END  
CODE 16311.511 | WHITE | PAC/PCS 15



ANT/SAT SOCKET - END  
CODE 16313.510 | WHITE | PAC/PCS 15

Intelligent tehnology,  
simple installation.

## Frames



-----  
SINGLE FRAME  
CODE 16000.501 | WHITE | PAC/PCS 15 .  
-----  
DOUBLE FRAME  
CODE 16000.502 | WHITE | PAC/PCS 10 .  
-----

-----  
TRIPLE FRAME  
CODE 16000.503 | WHITE | PAC/PCS 5 .  
-----

KLASIK eco



Design changes continusly, surround yourself with  
simplicity of products made today for the future.



KLASIK eco

SWITCHES AND PUSH BUTTONS, SOCKETS, ANTENNA CONNECTION,  
PHONE CONNECTION, PC CONNECTION

# KLASIK eco

## Technical specification "Klasik eco"

### SWITCHES AND PUSH BUTTONS

- Nominal values 10AX, 250 V - (AC) (x) za fluorescentne cijevi
- Screwless connections (for solid conductors, max. 2.5 mm<sup>2</sup> per terminal)
- Installation In box Ø 60mm with screws
- Norms: HRN EN 60669-1; DIN EN 60669-1
- Test Mark: dve

### SOCKETS

- Nominal values: 16 A, 250 V - (AC)
- Number of pole: 2P + (PE)
- Screw connection (za vodiče maks. 2.5 mm<sup>2</sup>)
- Installation In box Ø 60mm with screws
- Norms: HRN IEC 60884-1; DIN VE 0620-1

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Installation In box Ø 60mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 Mhz, 55 dB
- Installation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunicational devices
- Max. Voltage: 125 V - (AC)
- Max. current: 15 A
- Screw connection
- Contact material: CuSn

- Contact surface gold over nickel
- Installation In box Ø 60mm with screws
- Croatian Telecommunications Norms
- Explanation
- Modular-Jack connector
- First number- size of connectors, for example 6 or 8, second number

### PC CONNECTION

- Nominal voltage maks. 50 V DC
- Projected Power max: 1A na 50
- Voltage strenght: 1000V DC
- Isolation resistance: 500  $\Omega$ M
- Contact resistance: 20  $\Omega$ m
- Contact durability: >2500 input cycles
- Contact Terminals: LSA contacts for power conduits, diameter
- AWG 26..22, outside diameter 0.7-1.1 mm (one power conduit per contact)
- Suitable for use up to 155 Mbit/s
- Installation In box Ø 60mm with screws
- Connection made easy with the lever attached
- It is not protected from electromagnetical fields

Design changes continusly, surround yourself with simplicity of products made today for the future.

## Switches and push buttons



NORMAL SWITCH  
CODE 16011.20 | WHITE | PAC/PCS 15  
INTERMEDIATE SWITCH  
CODE 16031.20 | WHITE | PAC/PCS 15  
TWO-WAY SWITCH  
CODE 16041.20 | WHITE | PAC/PCS 15



SERIAL SWITCH  
CODE 16051.20 | WHITE | PAC/PCS 15



2-POLE SWITCH WITH INDICATOR LAMP 2-POL  
CODE 16023.20 | WHITE | PAC/PCS 15



LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 16062.23 | WHITE | PAC/PCS 15



PUSH-BUTTON FOR LIGHT WITHOUT INDICATOR  
CODE 16062.23 | WHITE | PAC/PCS 15



DOORBELL PUSH BUTTON WITH INDICATOR LIGHT  
CODE 16062.24 | WHITE | PAC/PCS 15

# KLASIK eco

## Switches and push buttons



PUSH-BUTTON FOR BELL WITHOUT SIG. LAMP  
CODE 16061.24 | WHITE | PAC/PCS\_15



TELEPHON SOCKET 2 CON.  
CODE 16322.210 | WHITE | PAC/PCS\_15

## Sockets



SOCKET 2-POL  
CODE 16200.20 | WHITE | PAC/PCS\_15



TELEPHON SOCKET 1 CON.  
CODE 16321.210 | WHITE | PAC/PCS\_15



ANTENNA SOCKET  
CODE 16311.210 | WHITE | PAC/PCS\_15



SOCKET ANT/SAT  
CODE 16313.210 | WHITE | PAC/PCS\_15

Design changes continuously, surround yourself with simplicity of products made today for the future.

## KLASIK eco modular system



Design changes continusly, surround yourself with simplicity of products made today for the future.



## KLASIK eco modular system

SWITCHES AND PUSH BUTTONS, SOCKETS, ANTENNA CONNECTION,  
PHONE CONNECTION, PC CONNECTION

# KLASIK eco modular system

## Technical specification "KLASIK eco modular system"

### SWITCHES AND PUSH BUTTONS

- Nominal values: 10AX, 250 V - (AC) (x) za fluorescentne cijevi
- Screwless connections (for solid conductors, max. 2,5 mm<sup>2</sup> per terminal)
- Instalation In box Ø 60mm with screws
- Norms: HRN EN 60669-1; DIN EN 60669-1
- Test Mark: dve

- Contact surface gold over nickel
- Instalation In box Ø 60mm with screws
- Croatian Telecommunications Norms
- Explanation
- Modular-Jack connector
- First number- size of connectors, for example 6 or 8, second number

### SOCKETS

- Nominal values: 16 A, 250 V - (AC)
- Number of pole: 2P + (PE)
- Screw connection (za vodiče maks. 2,5 mm<sup>2</sup>)
- Instalation In box Ø 60mm with screws
- Norms: HRN IEC 60884-1; DIN VE 0620-1

### PC CONNECTION

- Nominal voltage maks. 50 V DC
- Projected Power max: 1A na 50
- Voltage strenght: 1000V DC
- Isolation resistance: 500  $\Omega$ M
- Contact resistance: 20  $\Omega$ m
- Contact durability: >2500 input cycles
- Contact Terminals: LSA contacts for power conduits, diameter
- AWG 26..22, outside diameter 0,7-1,1 mm (one power conduit per contact)
- Suitable for use up to 155 Mbit/s
- Instalation In box Ø 60mm with screws
- Connection made easy with the lever attached
- It is not protected from electromagnetical fields

### ANTENNA CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 860 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45330

### SATELLITE CONNECTION

- For single and small joint devices
- Connection choking: R5 - 139 Mhz, 7 dB, TV 5 - 2400 Mhz, 2 dB
- Protection Shield: 0.1 - 450 Mhz, 75 dB, 470 - 860 Mhz, 65 dB, 860-2050 Mhz, 55 dB
- Instalation In box Ø 60mm with screws
- Norms: DIN 45325

### PHONE CONNECTION

- For the connection of telecommunicational devices
- Max. Voltage: 125 V - (AC)
- Max. curren: 15 A
- Screw connection
- Contact material: CuSn

Design changes continusly, surround yourself with simplicity of products made today for the future.


## Switches and push buttons



FOOTHOLD NORMAL SWITCH  
CODE 16011.29 | WHITE | PAC/PCS 15  
FOOTHOLD INTERMEDIATE SWITCH  
CODE 16031.29 | WHITE | PAC/PCS 15  
FOOTHOLD TWO-WAY SWITCH  
CODE 16041.29 | WHITE | PAC/PCS 15




FOOTHOLD SERIAL SWITCH  
CODE 16051.29 | WHITE | PAC/PCS 15



FOOTHOLD 2-POLE SWITCH WITH INDICATOR LAMP  
CODE 16023.29 | WHITE | PAC/PCS 15  
FOOTHOLD 2-POLE SWITCH WITHOUT INDICATOR LIGHT  
CODE 16021.29 | WHITE | PAC/PCS 15



FOOTHOLD PUSH-BUTTON FOR  
BELL WITH SIGNAL  
CODE 16062.249 | WHITE | PAC/PCS 15  
FOOTHOLD PUSH-BUTTON FOR  
BELL WITHOUT SIGNAL  
CODE 16061.249 | WHITE | PAC/PCS 15



FOOTHOLD PUSH-BUTTON FOR LIGHT  
WITH INDICATOR  
CODE 16062.239 | WHITE | PAC/PCS 15  
FOOTHOLD PUSH-BUTTON FOR LIGHT  
WITHOUT INDICATOR  
CODE 16061.239 | WHITE | PAC/PCS 15

## Sockets



FOOTHOLD SOCKET 2-POL  
CODE 16200.290 | WHITE | PAC/PCS 15

# KLASIK eco modular system


## Sockets



FOOTHOLD SOCKET  
TELEPHONE 1 CON.  
CODE 16321.219 | WHITE | PAC/PCS 15



FOOTHOLD SOCKET  
TELEPHONE 2 CON.  
CODE 16322.219 | WHITE | PAC/PCS 15



FOOTHOLD SOCKET ANTENSKA  
CODE 16311.219 | WHITE | PAC/PCS 15

## Frames



FOOTHOLD SOCKET ANT/SAT  
CODE 16313.219 | WHITE | PAC/PCS 15



SINGLE FRAME  
CODE 16000.280 | WHITE | PAC/PCS 20



DOUBLE FRAME  
CODE 16000.282 | WHITE | PAC/PCS 10



TRIPLE FRAME  
CODE 16000.283 | WHITE | PAC/PCS 5




QUADRUPLE FRAME  
CODE 16000.284 | WHITE | PAC/PCS 5

Design changes continuously, surround yourself with simplicity of products made today for the future.

## Flexible conduit



Flexible conduit

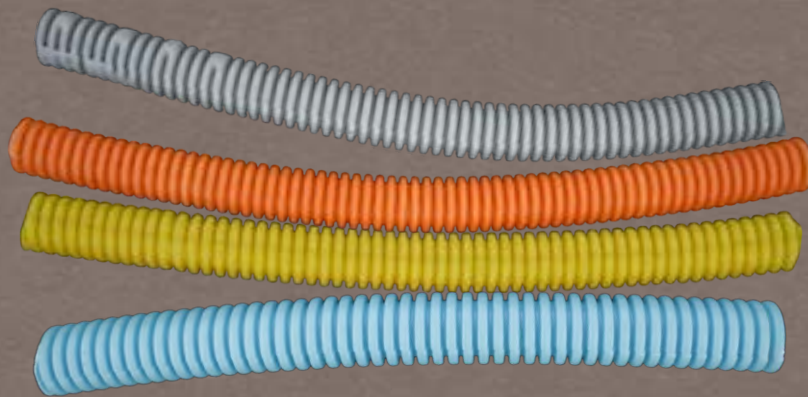

Flexible conduit

CONDUIT

# Flexible conduit

## Technical specification "Flexible conduit"

### FLEXIBLE CONDUIT

- Flexible, reversible, corrugated, insulation conduit, for light mechanical stresses
- For electric installation in buildings to be fitted into walls
- Made on non-inflammable or concentrate
- In industrial building, conduits are fitted to sheathing before concentrate casting
- Pressure resistance 320 N/5 cm
- Material high-temperature resistant HDPE PP
- Operating temperature - from -25 °C to 90 °C
- Flame non-resistant
- Resistant to atmosphere
- Color: orange
- Does not spread flame, according to IEC 60695-2-4 (1994) i DSTU 3987-2000

### FLEXIBLE CONDUIT FOR FLUSH-MOUNTING

- Flexible, reversible, corrugated, insulation conduit, for light mechanical stresses
- For electric installation in buildings, flush-mounting into walls
- Made on non-inflammable materials (brick, concentrate)
- Material HDPE PP
- Pressure resistance 125 N/5cm
- Operating temperature - from -25 °C to 90 °C
- Color: chrome yellow
- According to EN 61386-22:2004 + A11:2010 i EN 61386-1:2008

### SELFEXTINGUISHING FLEXIBLE CONDUIT FOR FLUSH-MOUNTING

- Selfextinguishing, flexible, reversible, corrugated, insulation conduit, for light mechanical stresses
- For electric installation in buildings, flush-mounting into all kinds walls
- Chlor free thermoplastic or high temperature resistance
- Pressure resistance 125 N/5cm
- Operating temperature - from -25 °C to 90 °C
- Flame resistance
- Color: grey
- Does not spread flame, according to IEC 60695-2-4 (1991) DSTU 3987-2000

### SELF-ESTINGUISHING FLEXIBLE CONDUIT

- Self-extinguishing flexible, reversible, corrugated, insulation conduit, for light mechanical stresses
- For electric installation in houses, for surface and flush-mounting in hollow walls
- Cannot be used in open air; non-resistant to direct influence of UV rays
- In industrial building, conduits are fitted to sheathing before concentrate casting
- High-temperature resistant, chlor free thermoplast
- Pressure resistance 320 N/5 cm
- Operating temperature - from -25 °C to 90 °C (short time 125°C)
- Flame resistant
- Resistant to atmosphere
- Color: Blue
- does not spread flame, according to IEC 60695-2-4 (1994) i DSTU 3987-2000

Multifunctional, modular, quality products  
by the most demanding international standards.



SELF-EXTINGUISHING FLEXIBLE CONDUIT FOR FLUSH-MOUNTING

CODE 119104 | GREY | INSIDE DIAMETER 11,2 | PAC/m 50  
CODE 119105 | GREY | INSIDE DIAMETER 15,5 | PAC/m 50  
CODE 119106 | GREY | INSIDE DIAMETER 20,0 | PAC/m 25



FLEXIBLE CONDUIT

CODE 129204 | ORANGE | INSIDE DIAMETER 11,2 | PAC/m 50  
CODE 129205 | ORANGE | INSIDE DIAMETER 15,2 | PAC/m 50  
CODE 129206 | ORANGE | INSIDE DIAMETER 19,6 | PAC/m 25



SELF-EXTINGUISHING FLEXIBLE CONDUIT

CODE 129104 | BLUE | INSIDE DIAMETER 11,2 | PAC/m 50  
CODE 129105 | BLUE | INSIDE DIAMETER 15,2 | PAC/m 50  
CODE 129106 | BLUE | INSIDE DIAMETER 19,6 | PAC/m 25



FLEXIBLE CONDUIT FOR FLUSH-MOUNTING

CODE 119204 | YELLOW | INSIDE DIAMETER 11,5 | PAC/m 50  
CODE 119205 | YELLOW | INSIDE DIAMETER 15,5 | PAC/m 50  
CODE 119206 | YELLOW | INSIDE DIAMETER 20,0 | PAC/m 25

# SURFACE-MOUNTING OG

## Technical specification "Surface-mounting OG"

### SWITCHES AND PUSH BUTTONS

- Degree of protection : bursting water protection IP44
- Nominal values: 10AX, 250 V -(AC) (x) for flourescent tubes
- Number of pole: 2P+ (PE)
- Screwless connections ( for solid conductors, max. 2,5 mm2 per terminal)
- Norms: HRN EN 60669-1; DIN EN 60669-1

### SOCKETS

- Degree of protection: bursting water protection IP44
- Nominal values: 16A, 250 V -(AC)
- Number of pole: 2P+ (PE)
- Screwless connections ( for solid conductors, max. 2,5 mm2 per terminal)
- Norms: HRN IEC 60884-1; DIN VDE 0620-1

### DISTRIBUTION BOX

- Degree of protection : bursting water protection IP44
- Nominal values: 400 V -
- Dimensions 80x80x50 mm - 5DIN VDE 0606-1
- Norms: DIN VDE 0606-1

### CLIP

- Used for stringing switches, sockets and distribution boxes

### CLAMP

- Used for holding and carrying cabels and tubes ili pipes
- Diameters of cabels and tubes hold by the clamp are listed in the table

## Switches and push buttons



### NORMAL SWITCH

CODE 11131.01/03| WHITE/GREY| PAC/PCS 10

### INTERMEDIATE SWITCH

CODE 11136.01/03| WHITE/GREY| PAC/PCS 10

### TWO-WAY SWITCH

CODE 11137.01/03| WHITE/GREY| PAC/PCS 10



### SERIAL SWITCH

CODE 11135.01/03| WHITE/GREY| PAC/PCS 10

Materials chosen with regard to resistance,  
design and high level of finish.

## Sockets



-----  
LIGHT PUSH BUTTON WITH INDICATOR LIGHT  
CODE 11134.11/13 | WHITE/GREY | PAC/PCS 10



-----  
DOORBELL PUSH BUTTON WITH INDICATOR  
CODE 11133.01/03 | WHITE/GREY | PAC/PCS 10



-----  
DOORBELL PUSH BUTTON WITHOUT INDICATOR  
CODE 11211.01/03 | WHITE/GREY | PAC/PCS 10



-----  
SOCKET WITH COVER  
CODE 11211.11/13 | WHITE/GREY | PAC/PCS 10



-----  
DISTRIBUTION BOX 80X80  
CODE 11219.11/13 | WHITE/GREY | PAC/PCS 10



-----  
SWITCH FOR BLINDS  
CODE 11139.01/03 | WHITE/GREY | PAC/PCS 10  
PUSH BUTTON FOR BLINDS  
CODE 11138.01/03 | WHITE/GREY | PAC/PCS 10

# Multiple portable sockets

## Technical specification "Multiple portable sockets"

### MULTIPLE PORTABLE SOCKETS WITH SWITCH

- Nominal values: 16A, 250 V ~
- For connection of electric device up to 3500 W
- With the folding coupling two-pole grid detachment is achieved as well as the inclusion control
- Inclusion points according to the C2a, IEC Publ 83 norm.
- Socket ports are placed on the longitudinal axis of the socket, they enable the inflow of 'L' socket
- Flexible connecting rod H05VV-F3G 1 mm<sup>2</sup> ili 1.5 mm<sup>2</sup> with the socket of C2b (ili C4) IEC Publ. 83 norm.
- The possibility of touch protection installment.

### MULTIPLE PORTABLE SOCKETS

- Norms: HRN IEC 60884-1, DIN 49440
- Nominal voltage: 250V
- Rated current: 16A

### OVERVOLTAGE PROTECTION AND TELECOMMUNICATION PART

- Norms: DIN EN 61643-11
- Test Mark : dve
- SPD (USG) Tip 3; klasa ili spec. inf. tipa Uoc-3000V
- Highest permanent voltage U<sub>c</sub>: 260V~/ 50-60 Hz
- Drainage current (8/20 μs)
  - L/PE i N/PE < 1.5 kA
  - L/N 1.5 kA
- Protection level 1.5 kA (8/20 μs)
  - L/PE i N/PE < 1.5 kA
  - L/N < 1.5 kA
- Time to process:
  - L/PE i N/PE < 500 ns
  - L/N < 25 ns

### OVERVOLTAGE PROTECTION AND TELECOMMUNICATION PART

- Norms: DIN EN 61643-21
- Projected voltage 230V~
- Projected power 200 mA
- Drainage strike power (8/20 μs, 300 udara) 500 A
- Max. Strike power (8/20 μs, 1 impuls) 5 kA
- Protection level 500 A (8/20 μs) < 55V
- Protection level 5 kA (8/20 μs) < 400V
- Suppression of passing signal (300 Hz - 4000 Hz) < 0.1 dB
- Connector RJ 11 (MJ 6/4, DIN EN 60603)

A product which is different in it's elegance, sophistication, geometry and the choice of materials and color.



MULTIPLE POWER OUTLET - 3 SOCKETS WITHOUT CABLE  
 CODE 11517.6 | RED-BLACK | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 3 SOCKETS 2m  
 CODE 11517.1 | RED-BLACK | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 3 SOCKETS 4m  
 CODE 11517.3 | RED-BLACK | PAC/PCS 12



MULTIPLE POWER OUTLET - 3 SOCKETS WITHOUT CABLE  
 CODE 11517.7 | BROWN-BEIGE | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 3 SOCKETS 2m  
 CODE 11517.2 | BROWN-BEIGE | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 3 SOCKETS 4m  
 CODE 11517.4 | BROWN-BEIGE | PAC/PCS 12



MULTIPLE POWER OUTLET - 5 SOCKETS WITHOUT CABLE  
 CODE 11518.6 | RED-BLACK | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 5 SOCKETS 2m  
 CODE 11518.1 | RED-BLACK | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 5 SOCKETS 4m  
 CODE 11518.3 | RED-BLACK | PAC/PCS 12



MULTIPLE POWER OUTLET - 5 SOCKETS WITHOUT CABLE  
 CODE 11518.7 | BROWN-BEIGE | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 5 SOCKETS 2m  
 CODE 11518.2 | BROWN-BEIGE | PAC/PCS 12  
 MULTIPLE POWER OUTLET - 5 SOCKETS 4m  
 CODE 11518.4 | BROWN-BEIGE | PAC/PCS 12

# Plugs with protective grounding

## Technical specification "Plugs with protective grounding"

### PLUG 2-POL

- Nominal values: 16A, 250 V ~
- Socket according to C2a IEC Publ. 83 norm ( with the lateral protective contact)
- Test Mark: dve

### PLUG 5-POL

- Nominal values: 16A, 400 V / 230V ~
- Number of pole: 3P+N+uzemljenje (PE)
- Connection Rod vertical to longitudinal axis

### PLUG "T"


- Nominal values: 16A, 250V ~
- Publ. 83 norm IEC Publ.83
- 2 socket C1a IEC Publ.83

### INTERSWITCHES

- For the installment on the flexible rod
- Nominal values: 4 A 250V ~ (AC)
- Krog interruption on one pole
- Connection- 2 screws and two clamps
- Mutul unladen of the rod




PLUG  
CODE 11502/.1 | WHITE/BLACK | PAC/PCS\_50




PLUG  
CODE 121503/.1 | WHITE/BLACK | PAC/PCS\_50

A wide range of quality made products  
with timeless design



-----  
PLUG L  
CODE 121504/1 | WHITE/BLACK | PAC/PCS\_50



-----  
PLUG RUBBER  
CODE 11328.21 | WHITE/BLACK | PAC/PCS\_20



-----  
SOCKET RUBBER  
CODE 11329.22 | WHITE/BLACK | PAC/PCS\_50



-----  
PLUG 3P+N+PE  
CODE 11098 | WHITE/BLACK | PAC/PCS\_25



-----  
PLUG 3P+N+PE  
CODE 11097 | WHITE/BLACK | PAC/PCS\_28



-----  
PLUG T-ADAPTER  
CODE 11196/1 | WHITE/BLACK | PAC/PCS\_30

# DISTRIBUTION BOARDS AND POWER METER PANEL

## Distributors



DISTRIBUTOR DOMINO 1-ROW  
CODE 1418213 | GREY | PAC/PCS 1



DISTRIBUTOR DOMINO 2-ROWS  
CODE 1418314 | GREY | PAC/PCS 1



DISTRIBUTOR DOMINO 3-ROWS  
CODE 1418414 | GREY | PAC/PCS 1

## Ploče brojila



POWER METER PANEL - SMALL  
CODE 141813 | GREY | PAC/PCS 1



POWER METER PANEL - LARGE  
CODE 141814 | GREY | PAC/PCS 1

# METER AND DISTRIBUTION CABINETS KPMO



KPMO-0 UNEQUIPPED, IN WALL

CODE 135111 | GREY | PAC/PCS 1

KPMO-0 EMPTY, IN WALL

CODE 135111.0 | GREY | PAC/PCS 1

KPMO-0 UNEQUIPPED, UNIVERSAL

CODE 135211.2 | GREY | PAC/PCS 1



KPMO-1 UNEQUIPPED, IN WALL

CODE 135112 | GREY | PAC/PCS 1

KPMO-0 EMPTY, IN WALL

CODE 135112.0 | GREY | PAC/PCS 1

KPMO-0 UNEQUIPPED, UNIVERSAL

CODE 135212.2 | GREY | PAC/PCS 1



KPMO-2 UNEQUIPPED, IN WALL

CODE 135113 | GREY | PAC/PCS 1

KPMO-0 EMPTY, IN WALL

CODE 135113.0 | GREY | PAC/PCS 1

KPMO-0 UNEQUIPPED, UNIVERSAL

CODE 135213.2 | GREY | PAC/PCS 1



KPMO-3 UNEQUIPPED, IN WALL

CODE 135114 | GREY | PAC/PCS 1

KPMO-0 EMPTY, IN WALL

CODE 135114.0 | GREY | PAC/PCS 1

KPMO-0 UNEQUIPPED, UNIVERSAL

CODE 135214.2 | GREY | PAC/PCS 1

KPMO KPMO ON REQUEST, IN WALL

CODE 135214.2 | GREY | PAC/PCS 1

# METER AND DISTRIBUTION CABINETS KPMO



-----  
KPMO 0 UNEQUIPPED  
ON WALL  
CODE\_135211.2 | RAL\_7035 | PAC/PCS\_1 \_



-----  
KPMO 1 UNEQUIPPED  
ON WALL  
CODE\_135212.2 | RAL\_7035 | PAC/PCS\_1 \_

Note







**EKVA D.O.O. VAREŠ**

PROIZVODNJA I TRGOVINA ELEKTOINSTALACIJSKOG MATERIJALA

Bosna i Hercegovina, 71330 Vareš, Pajtov Han bb

Tel. +387 32 841 873; Fax. +387 32 841 867; [ekva@ekvabh.com](mailto:ekva@ekvabh.com)

[www.ekvabh.com](http://www.ekvabh.com)